

## **Filter Division**

## **WB-ACAM**

### Walking Beam - Automated Cartridge Assembly Machine



■The **Massman** Companies




# **Filter Division**


### **WB-ACAM** Specifications

#### **WB-ACAM Design Capability**

CHARACTERISTIC	WB-ACAM-aU	WB-ACAM-C	WB-ACAM-H
Cycle Speed	Up to 25-30ppm	Up to 50-55ppm	Up to 60-66ppm
Slit / Length	2.00″- 8.00″ (50 - 200mm)		
Pleat Height	0.48″-1.00″ (12 - 25.0mm)		
Compressed Width	2.5″-7.0″ (64 - 177mm)		
Free Length	4.0″-12.0″ (100 - 300mm)		
Media Thickness	0.020″- 0.040″ (0.50 - 1.00mm)		
Filter Diameter	2.4"- 3.5" (61 - 89mm)		
Center Tube Dia.	1.00" - 2.00" (3"+) (25 - 50mm) (75mm+)		

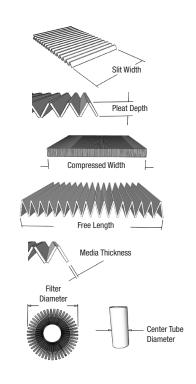

### **WB-ACAM Top View With Step Feeder**

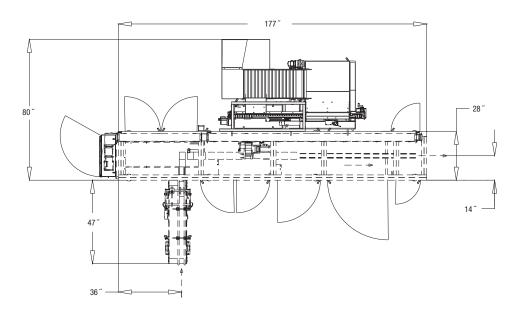

- \* Listed dimensions are only for reference and are subject to change without notice.
- \*\* WB-ACAM equipment can conform to OSHA, UL, CUL, CSA, NFPA and CE standards.

#### **Features**

- Seams single layer cellulose or synthetic media as well as multilayer laminated media
- For water, air, oil, alcohol, and fuel filtration, as well as medical applications
- World class manufacturing capability built to your country's build standards
- Each part is stamped with a unique part number, and then painted, plated, or anodized
- 24-hour phone support
- · Dedicated spare parts department
- · After sale onsite service